


SERIES LCT316



COUNT DOWN DIGITAL TIMER

Quick Installation, Digital Input, Audible Alarm

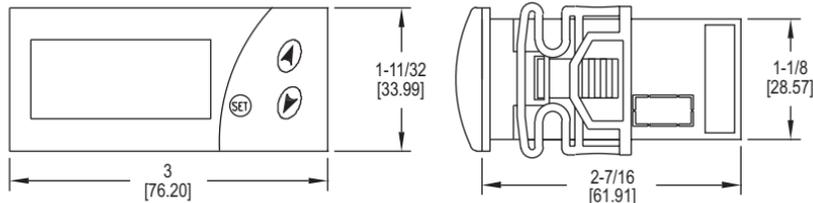

The **Series LCT316 Count Down Digital Timer** provides accurate countdown timing for a variety of applications. The timer can be triggered remotely using the digital input terminals or locally via the set button. Time intervals can be set up to 999 minutes or seconds and an internal buzzer will sound when the time interval has expired.

FEATURES/BENEFITS

- 1 second to 999 minute field set time interval
- Audible alarm for status indication

APPLICATIONS

- Commercial cooking equipment
- Commercial dish washers and refrigeration equipment

MODEL CHART	
Model	Supply Power
LCT316-100	115 VAC
LCT316-200	230 VAC
LCT316-300	12 VAC/DC
LCT316-400	24 VAC/DC

SPECIFICATIONS

Operating Temperature Range: 32 to 158°F (0 to 70°C).

Control Output Ratings: Relay, SPST NO, 16 A at 250 VAC resistive.

Weight: 5.6 oz (158.8 g).

Status Light: LED shows time and operation.

Inputs: Digital input for start and reset.

Supply Voltage: 115 VAC, 230 VAC, 12 VAC/DC, 24 VAC/DC depending on model.

Power Consumption: 4 VA.

Agency Approvals: CE, cURus.