

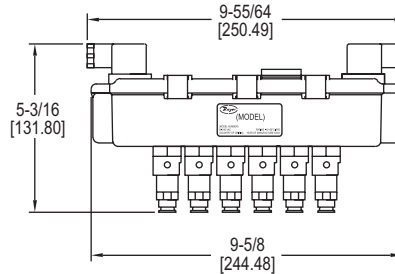


# SOLENOID VALVE ENCLOSURE WITH TIMER

Compact Size, NEMA 4X Enclosure



The **Series SVT Solenoid Valve Enclosure with Timer** is a compact, reliable, and economic package that combines a timer board and solenoid valve enclosure into one package. Each model is available with 2, 4, or 6 valves, but expansion modules can easily be daisy chained for a maximum of 60 outputs.

**FEATURES/BENEFITS**

- Compact, all-in-one package eliminates the need for separate wiring and enclosures
- Universal power requirements for both domestic and overseas use
- Field selectable cleaning functions and on/off settings to personalize for any need

**APPLICATIONS**

- Dust collection
- Pneumatic conveying
- Industrial vacuums

SPECIFICATIONS	
<b>Service:</b> Compatible gases, filtered and oil free.	<b>Electrical Connection:</b> 2 DIN A 43652 connectors.
<b>Wetted Materials:</b> Pilot body: Brass; Spring: 302 SS; O-ring: NBR.	<b>Enclosure Rating:</b> NEMA 4X (IP66).
<b>Temperature Limits:</b> 14 to 140°F (-10 to 60°C).	<b>Enclosure Material:</b> Polyamide with carbon fiber, polycarbonate, TPE rubber.
<b>Pressure Limit:</b> 145 psi (10 bar).	<b>Process Connection:</b> 1/4" OD push to connect.
<b>Power Requirements:</b> 90-240 VAC, 50 or 60 Hz or 24 VAC/VDC ±10%.	<b>Mounting Orientation:</b> Any position.
<b>Power Consumption:</b> 25 VA.	<b>On-Time:</b> 150 ms to 700 ms.
<b>Fuse:</b> 0.5 A delayed.	<b>Off-Time:</b> 4 s to 210 s.
	<b>Agency Approvals:</b> CE.

MODEL CHART							
Model	Description	Number of Solenoids	Supply Voltage	Model	Description	Number of Solenoids	Supply Voltage
<b>SVT-2</b>	Solenoid valve enclosure with timer	2	90-240 VAC	<b>SVT-4-DC</b>	Solenoid valve enclosure with timer	4	24 VDC/VAC
<b>SVT-3</b>	Solenoid valve enclosure with timer	3	90-240 VAC	<b>SVT-6-DC</b>	Solenoid valve enclosure with timer	6	24 VDC/VAC
<b>SVT-4</b>	Solenoid valve enclosure with timer	4	90-240 VAC	<b>SVTE-3</b>	Expansion module	3	Any
<b>SVT-6</b>	Solenoid valve enclosure with timer	6	90-240 VAC	<b>SVTE-4</b>	Expansion module	4	Any
<b>SVT-2-DC</b>	Solenoid valve enclosure with timer	2	24 VDC/VAC	<b>SVTE-6</b>	Expansion module	6	Any
<b>SVT-3-DC</b>	Solenoid valve enclosure with timer	3	24 VDC/VAC				

**Note:** SVTE modules are powered from the main enclosure and can be used with either the 90 to 240 VAC or the 24 VDC/VAC SVT models.

USA: California Proposition 65  
 ⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov